


# HAMMERHEAD SWING ARM CLICKER PRESS

## 20 Ton – Data Sheet

sales@americanclickerpress.com | www.americanclickerpress.com | (801) 613-7997 ext: sales

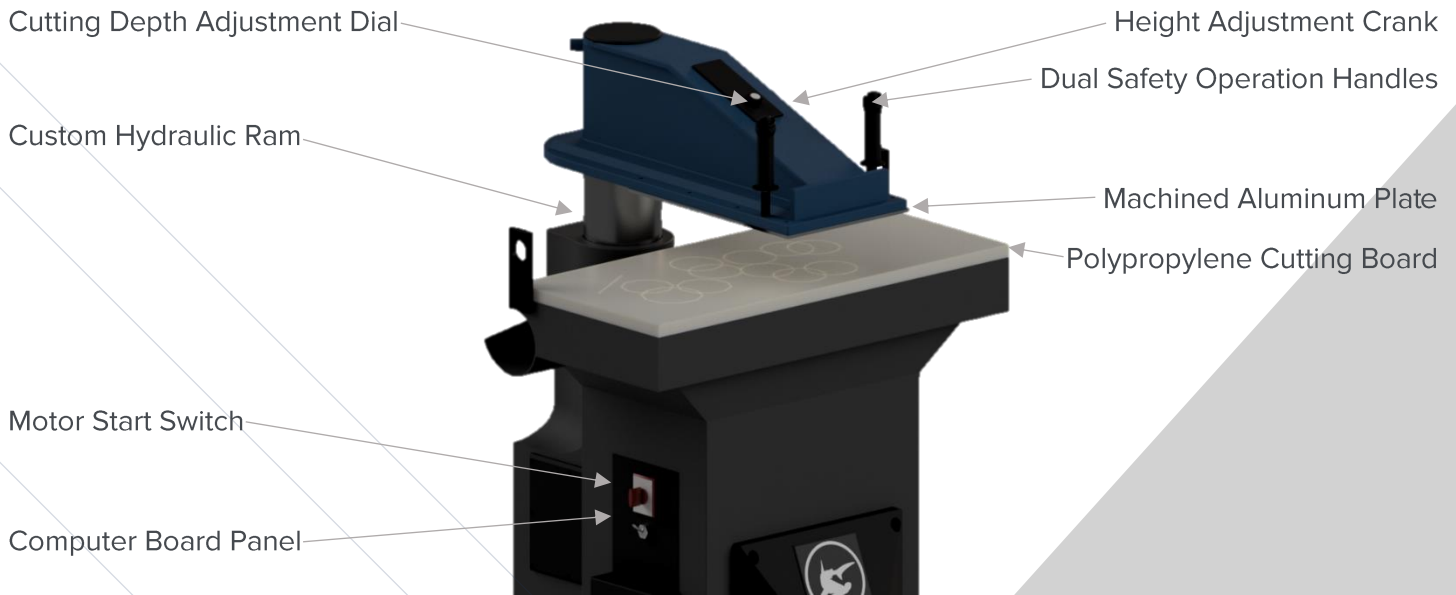

### DESIGN, USE, AND FEATURES

- Two-button operational controls- must be pressed within .25 seconds of each other.
- Head swivels easily to reduce operator fatigue
- Hydraulic-controlled height adjustment (head will lower slowly after press is powered down)
- Ships with free polypropylene cutting board
- Time and pressure-based cutting modes
- Two chamber design for proper ventilation and easy access to motor and electronics
- Energy efficient

	20 Ton	
<b>Base Footprint</b>	24.6" W x 28.5" D	
<b>Shipping Dimensions</b>	48"W x 48"D x 65"H	
<b>Head Size</b>	14.5" W x 19" D	
<b>Table Size</b>	35.5" W x 17" D	
<b>Max Die Dimensions</b>	14.5" x 17"	
<b>Gross Crated Weight</b>	1300 LBS	
<b>Tonnage</b>	20	
<b>Daylight</b>	5"	
<b>Stroke Depth</b>	3.5"	
<b>Stroke Adjustment</b>	1.5"-5"	
<b>Stroke Speed</b>	3.94 in/s	
<b>Oil Capacity</b>	~7 Gallons	
<b>Cutting Pad</b>	1" Thick Polypropylene	
<b>Machine Power</b>	3 Phase, 220V, 60HZ	3 Phase, 480V*, 60HZ
<b>Amperage</b>	5A	3A
<b>Motor Power</b>	1.1KW	
	1.5	

# HAMMERHEAD SWING ARM CLICKER PRESS

## 20 Ton – Data Sheet

sales@americanclickerpress.com | www.americanclickerpress.com | (801) 613-7997 ext: sales

The 20 ton HAMMERHEAD swingarm clicker press has 4.75" of space between the platen and the table when fully open. However, with a ~1" nylon cutting board and ~0.25" cutting die the effective stroke of the head is ~3.5".

The footprint of the machine is shown at the widest parts of the profile. Be sure that your workspace can accommodate the machine and the recommended 30" buffer around the machine.

